



TEST REPORT

TEST ITEM	: Dustproof And Waterproof Test
CLASSIFICATION	
INSPECTION	: Commission test
MANUFACTURER	: P.R. China Qianjin 1 Road, 35th District, Bao'An, Shenzhen, 518101
ADDRESS OF MANUFACTURER	: Level 3, Block A, Gaoxing Building, Anhua Industrial Park, Qianjin 1 Road, 35th District, Bao'An, Shenzhen, 518101
MANUFACTURER	: Fanvil Technology Co.,Ltd.
ADDRESS OF CLIENT	: P.R. China Qianjin 1 Road, 35th District, Bao'An, Shenzhen, 518101
CLIENT	: Fanvil Technology Co.,Ltd.
NAME OF SAMPLE	: !12 IP intercom

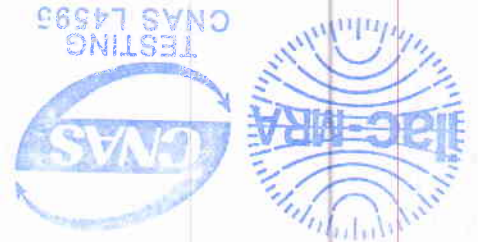

Test Report

Name Of Sample		I12 IP Intercom		Test Model	I12
Client		Fanvil Technology Co., Ltd.			
Address Of Client		Level 3, Block A, Gaoxinqi Building, Anhua Industrial Park, Qianjin 1 Road, 35th District, Bao'an, Shenzhen, Guangdong, China			
Name Of Receipt		Delivering		Inspection	Commission Test
Quantity Of Sample		1 pcs		Weight	0.95Kg
Page		7 pages		Test Date	2015-09-23
Lab. Name And Address		Shenzhen LCS Compliance Testing Laboratory Ltd. 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China			
Test Standard		IEC 60529:1989+A1:1999+A2: 2013; GB 4208-2008;			
Rating Of Sample		I2V=, I2W			
Sample Characteristic And Condition		The sample was in good condition operation as normally			
Test Result		Measured data see report attached			
Ambient Temperature		25.2 °C		Relative Humidity	64 %
Test Report		Test By:			
Special-purpose		Check By:			
Seal		Date Of Issue:			

Attachment Of Report

Item	Test Item	Standard Requirement	Result
1	Dustproof test (IP6X)	a. Square-meshed sieve diameter: 75µm; b. Talcum powder density: 2kg/m ³ ; c. under pressure; Test time: 8h.	No dust is inside the enclosure
2	Waterproof test (IPX5)	a. Internal diameter of the nozzle: 6.3mm; b. Delivery rate: 12.5(±5%) 1/min; c. Water pressure: to be adjusted to achieve the specified delivery rate; d. Core of the substantial stream: circle of approximately 40mm diameter at 2.5 m distance form nozzle e. Test duration per square meter of enclosure surface area likely to be sprayed: 1 min f. Minimum test duration: 3min g. Distance from nozzle to enclosure surface: between 2.5m and 3m	No ingress of water is inside the enclosure
		After test, if no deposit of dust is inside the enclosure, test is pass	After test, the enclosure shall be inspected for ingress of water.

Attachment Of Report_Photos

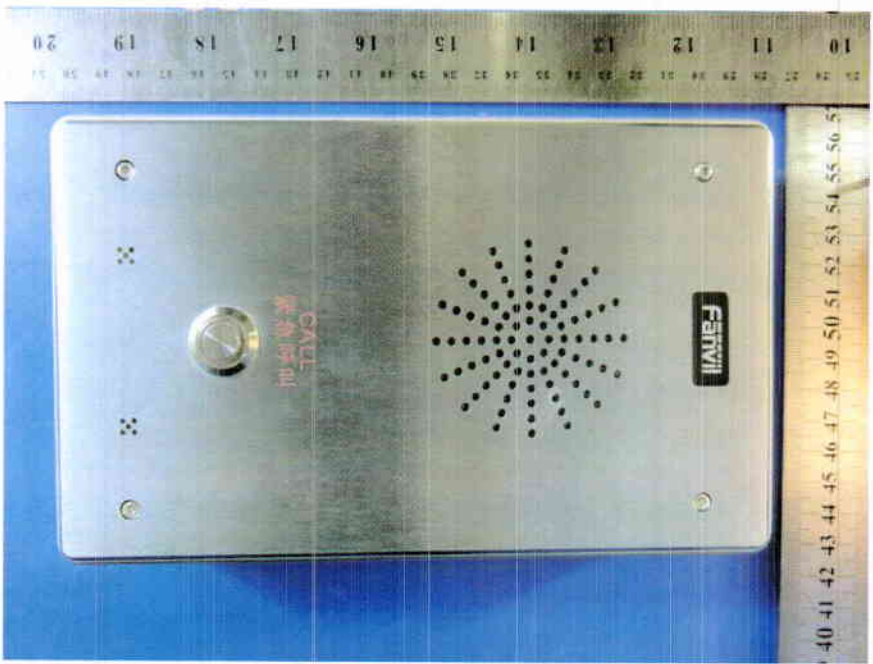


Fig. 1 Product Picture

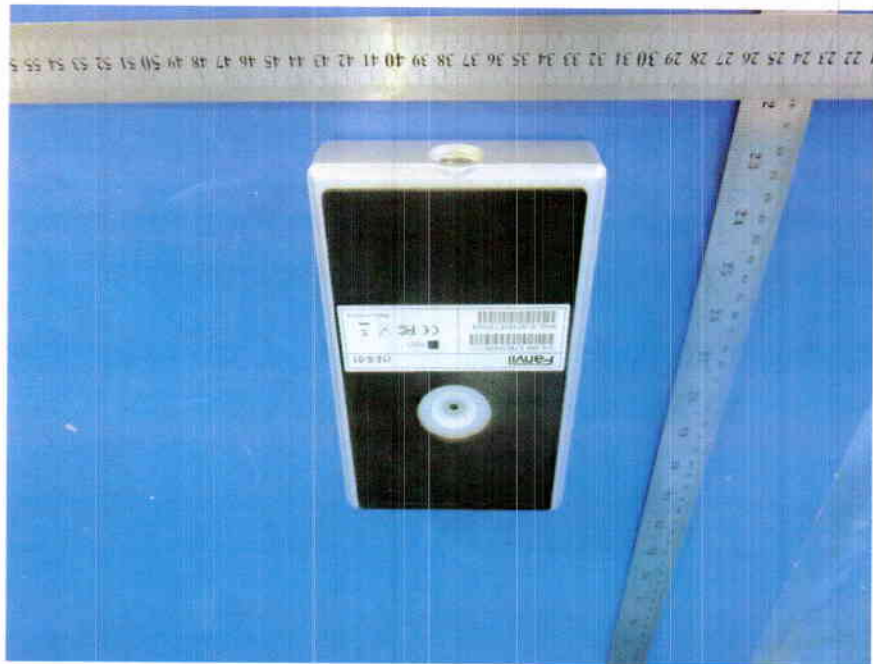


Fig. 2 Product Picture

Attachment Of Report_Photos



Fig. 3 The Waterproof Test

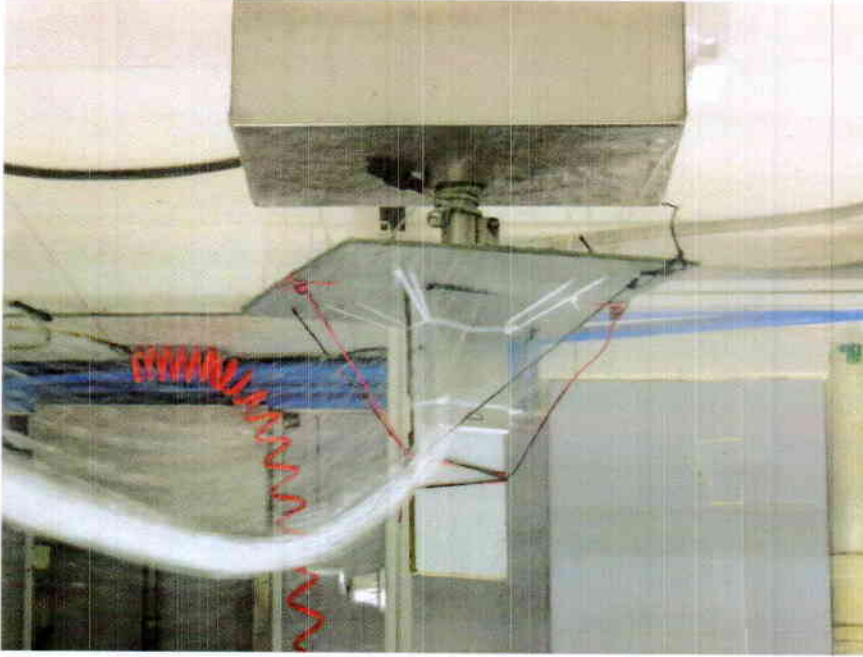


Fig. 4 The Waterproof Test

Attachment Of Report_Photos

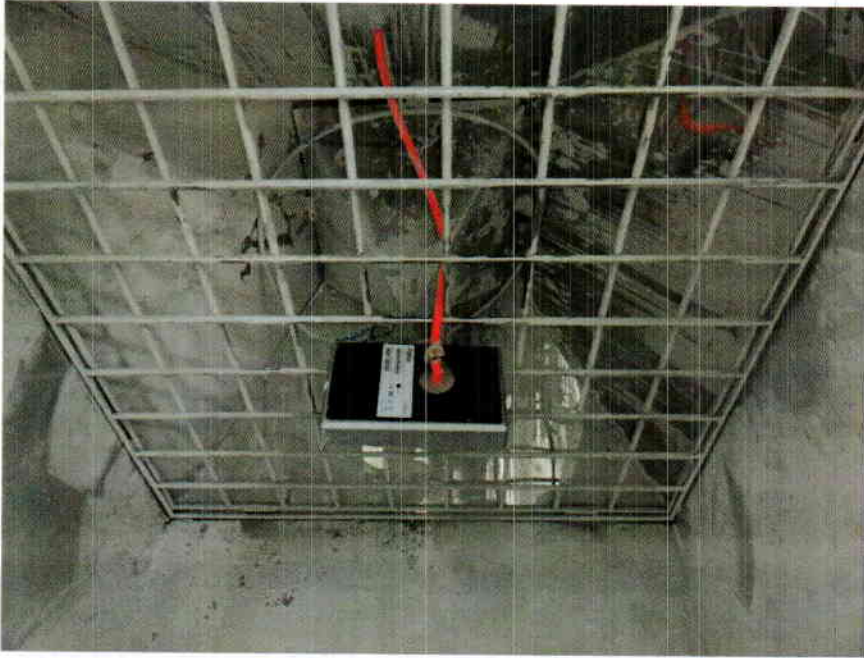


Fig. 5 The Dustproof Test



Fig. 6 The Dustproof Test

Attachment Of Report_Photos

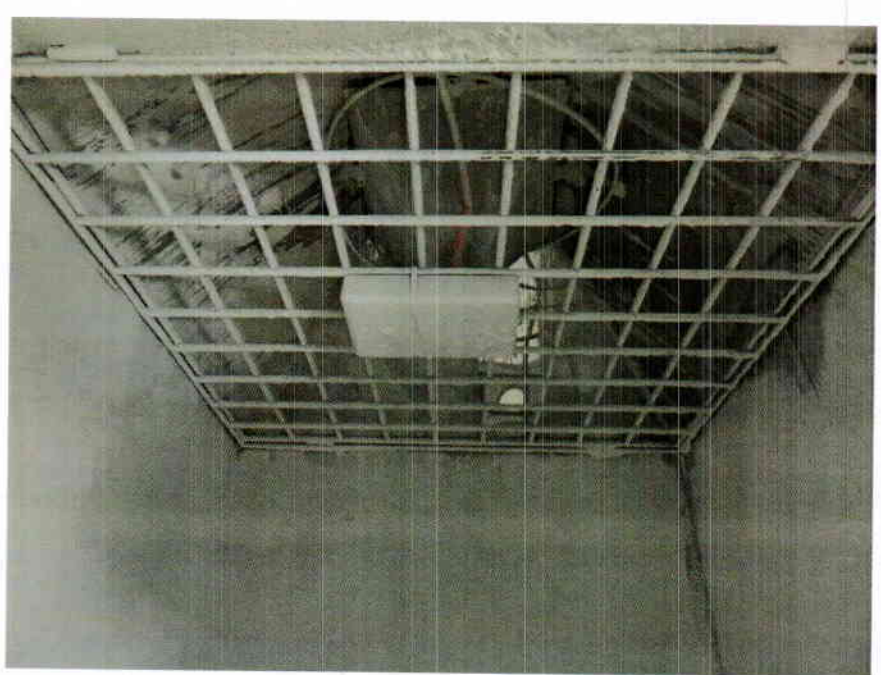


Fig. 7 The Dustproof Test